

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

# SmartCombi™ Combi-steamer

## Electric and gas

MODEL **ESC-215 electric**  
**GSC-215 gas**



SmartCombi model ESC-215

The ESC/GSC-215 has a capacity of (20) full-size steam table pans 2 ½ in. (65 mm) or (20) Crosswise Plus pans and grids.

### General Information

Henny Penny SmartCombi combi ovens use moist heat and dry heat, either separately or in combination, to produce the ideal cooking conditions for a wide variety of foods.

Four basic cooking modes employ a variety of built-in functions in different ways.

- Steaming/Moist heat:  
86-266°F (30-130°C)  
Low and high-temperature steaming.
- Convection cooking/Dry heat:  
Electric: 86-572°F (30-300°C)  
Gas: 86-482°F (30-250°C)  
Active humidity reduction
- Combination/Dry and moist heat:  
86-482°F (30-250°C).  
Individual or automatic humidity control between 0 and 100% RH.
- Rethermalizing/Dry and moist heat:  
86-356°F (30-180°C)  
Special fan speed function and banqueting programs.

Henny Penny bridges the gap between boiler and boilerless combis with patented Advanced Steam Technology.™ This system introduces large amounts of steam into the cooking cabinet quickly without the deliming and maintenance issues of a boiler.

Operator can select humidity levels from 0-100% relative humidity. Digital humidity control continuously measures the humidity level in the cabinet and maintains the selected level by automatically adding steam or venting excess humidity. The SmartCombi is fully programmable and includes a wide range of pre-programmed menu selections for fully automated cooking.

Units include a multi-sensor core temperature probe for automatic probe cooking.

Lengthwise roll-in cart available for either crosswise or lengthwise loading of standard steam table pans.

### Standard Features

- Patented Advanced Steam Technology for effective steam generation without boilers.
- ClimaSelect climate control allows the selection of humidity levels between 0% and 100% relative humidity. ClimaMonitor feature measures and maintains selected level automatically.
- Digital control panel features easy-to-read LED displays and icons. Operators can choose automatic cooking from pre-programmed menu items or select and input cooking parameters manually.
- Simple CombiDial control—rotate to select, push to confirm and start.
- Temperatures can be displayed in either °F or °C. Operations and service diagnostics programs offer a choice of languages.
- Auto-reverse fan for fast, even cooking throughout the cabinet.
- WaveClean™ self-cleaning system significantly reduces water and detergent consumption.
- Filterless grease extraction.
- Rethermalizing and plated banquet system utilizes specific settings including fan speed function for easy, high quality banquet cooking.
- Auto-retractable hose shower for

easy, quick rinsing.

- Seamless interior cabinet of corrosion-resistant chrome nickel steel. Exterior made from 1 mm chrome nickel stainless steel.
- Full seal door with triple-pane glass.
- Roll-in oven cart.

### Options, accessories

- Two-stage safety door lock
- Alternative voltages
- Chicken grids
- Marine version



Henny Penny Corporation  
PO Box 60 Eaton OH 45320 USA

+1 937 456.8400 800 417.8417  
+1 937 456.8434 Fax 800 417.8434 Fax


[www.hennypenny.com](http://www.hennypenny.com)

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

MODEL **ESC-215 electric**  
**GSC-215 gas**

# SmartCombi™ Combi-steamer

## Electric and gas

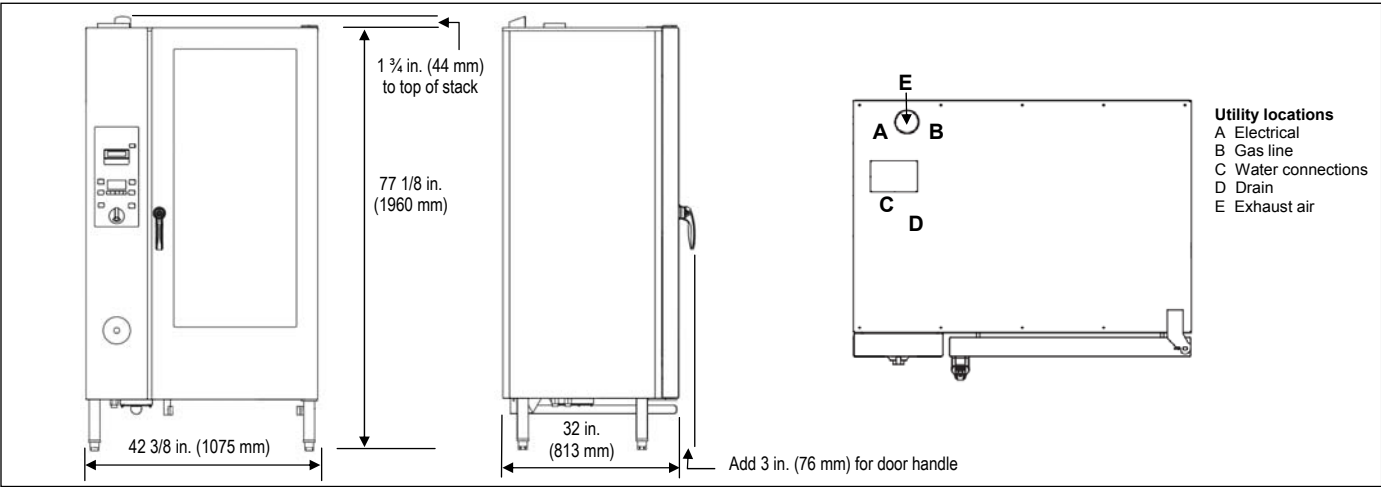

**Dimensions**

Height: 77 1/8 in. (1960 mm)  
Width: 42 3/8 in. (1075 mm)  
Depth: 32 in. (813 mm)

**Required clearances**

Left: 20 in. (500 mm) service access:  
Right: 2 in. (50 mm) air flow  
Back: 2 in. (50 mm) air flow, utility connections:  
Front: 28 in. (700 mm) door open

**Crated dimensions**

Length: 45 1/4 in. (1150 mm)  
Depth: 37 7/8 in. (962 mm)  
Height: 86 1/2 in. (2200 mm)  
Volume: 86 cu. ft. (2.43 m³)

**Pan capacity**

20 full-size steam table pans, 2 1/2 in. (65 mm) crosswise or lengthwise.  
20 Crosswise Plus pans and grids.  
6 standard chicken grids, 36 chickens per load.  
12 Crosswise Plus chicken grids, 72 chickens per load.

**Net weight**

ESC: 782 lbs. (355 kg)  
GSC: 815 lbs. (370 kg)

**Crated weight**

ESC: 826 lbs. (375 kg)  
GSC: 859 lbs. (390 kg)

**Water connections**

3/4 in. standard cold water connection  
3/4 in. soft water connection  
2 in. (50 mm) drain

**Power**

Electric units: Connected load 32.7 kW  
Gas units: Output: 123000 BTU/hr  
Connection: R 3/4" NPT external thread  
Options: Natural Gas or LP

**Laboratory certifications**



Electrical	Volts	Phase	Cycle/Hz	Watts	Amps	Wire
Electric units	208	3	60	31300	94.6	3+G
	240	3	60	31300	83.0	3+G
	400	3	50/60	31300	47.0	3NG
	440	3	60	31300	43.4	3+G
	480	3	60	31300	40.0	3+G
Gas units	120	1	60	1500	N/A	1NG

**Bidding Specifications**

- Provide Henny Penny Model ESC-215 (electric) or GSC-215 (gas) combination oven/steamer. Models enable the selection of convection (hot air), gentle or regular steam or a combination of these cooking modes.
- Units shall have an LED clear-text display that provides optimal viewing of programs, time, temperature and other data.
- Units shall have a condensate drip pan with central direct drain.
- Units shall have patented Advanced Steam Technology.
- Units shall have a cabinet fan with two speeds, as well as two rotation directions, to enable autoreverse operations.
- Units shall have "AutoShower," integrated flushing function.
- Units shall have "WaveClean" automatic self-cleaning system.
- Units shall have seamless stainless steel cooking chamber, a hygiene-supporting door with isolated window, integrated door contact switch, electrical door lock and pluggable door seal. Unit also will have 0% to 100% humidity control within the cooking chamber.
- Units shall have 572°F maximum operating temperature using hot air convection with accurate temperature controls at all operating temperatures.
- Units shall accommodate up to (20) full-size steam table pans, 2 1/2 in. deep on roll-in cart.

Continuing product improvement may subject specifications to change without notice.



[www.hennypenny.com](http://www.hennypenny.com)